


Specifications

Nominal Voltage	12V	
Rated Capacity(20 hour rate)	15AH	
Dimensions ±1mm	Length	180mm(7.09")
	Width	77mm(3.03")
	Height	95mm(3.74")
	Total Height (with terminals)	168mm(6.61")
Weight	Approx.5.35kg (11.77lbs)	
Standard Terminal	L1	
Optional Terminal	A1	

Discharge Characteristics(20°C ,68°F)

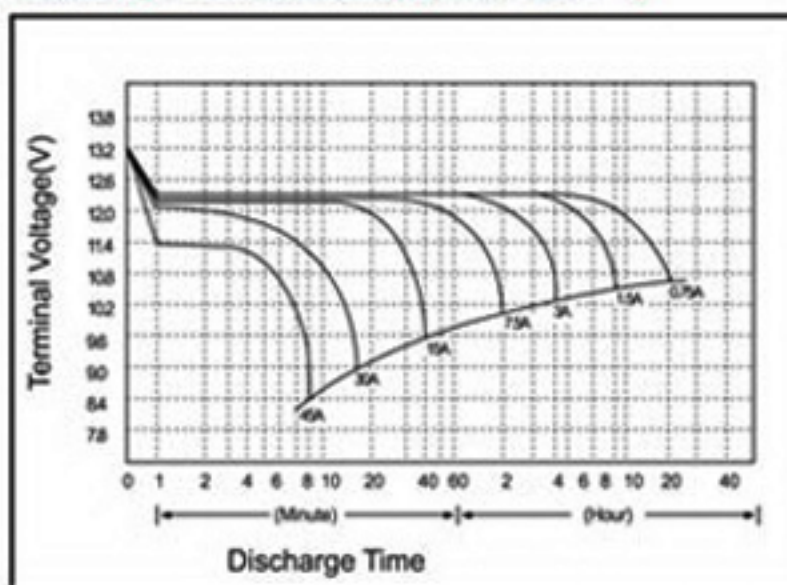

Electrical Specifications

Capacity 77°F (25°C)	20 hour rate (750mA)	15AH
	10 hour rate (1.4A)	14AH
	5 hour rate (2.5A)	12.8AH
	1 hour rate (9.0A)	9.0AH
Internal Resistance	Fully charged battery 77°F (25°C)	13m Ω
Capacity Affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than4.50A Voltage14.4-15.0V 77°F (25°C) Standby:Voltage13.5-13.8V 77°F (25°C)	

Discharge Characteristics(0°C/32°F ,40°C /104°F)

