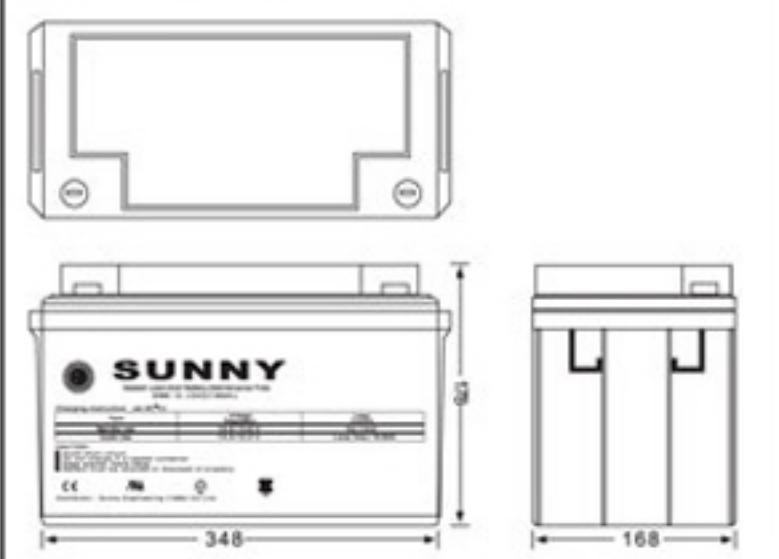
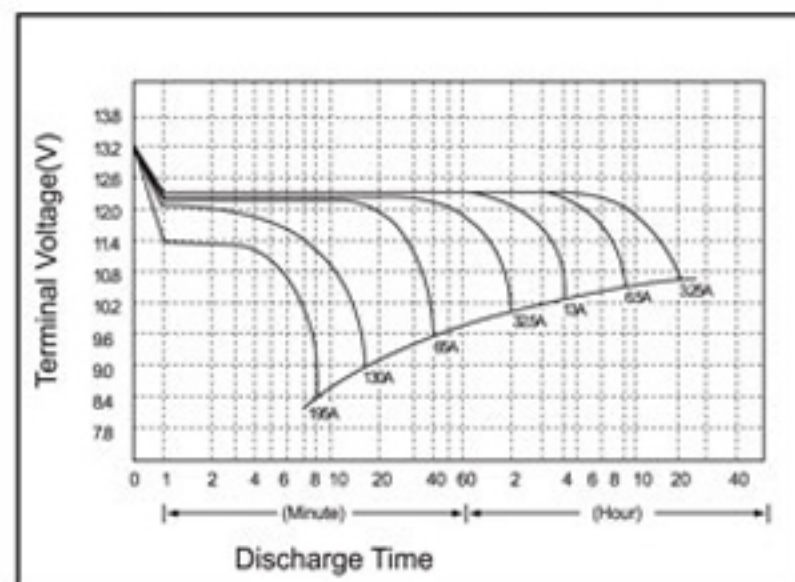



**Dimensions(mm)**


### Specifications

Nominal Voltage	12V	
Rated Capacity(20 hour rate)	65AH	
Dimensions ±1mm	Length	348mm(13.70")
	Width	168mm(6.61")
	Height	178mm(7.01")
	Total Height (with terminals)	
Weight	Approx.22.8kg (50.16lbs)	
Standard Terminal	B2	
Optional Terminal	A3	

**Discharge Characteristics(20°C ,68°F )**


### Electrical Specifications

Capacity 77°F (25°C )	20 hour rate (3.2A)	65AH
	10 hour rate (6.05A)	60.5AH
	5 hour rate (11.06A)	55.3AH
	1 hour rate (37.1A)	37.1AH
Internal Resistance	Fully charged battery 77°F (25°C )	6.5m Ω
Capacity Affected by Temperature (20 hour rate)	104°F (40°C )	102%
	77°F (25°C )	100%
	32°F (0°C )	85%
	5°F (-15°C )	65%
Self-Discharge 77°F (25°C )	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than19.50A Voltage14.4-15.0V 77°F (25°C ) Standby:Voltage13.5-13.8V 77°F (25°C )	

**Discharge Characteristics(0°C/32°F ,40°C /104°F )**
